

Figure 7

7. Remove cap from grommet assembly. (Figure 7)
8. Place hook on underside of cap under the front edge of the power center and slide toward rear. (Figure 8)
9. Tap downward on cap to fully secure and lock cap in place on the power center. (Figure 9)



Figure 8

- 9a. Cap may be removed by prying downward as shown. (Figure 10)



Figure 9

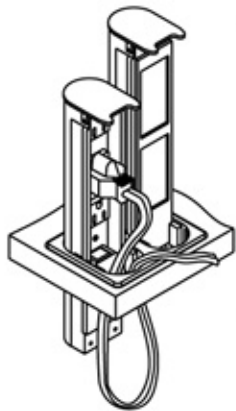


Figure 11

10. Slide the power center through the grommet until it snaps into it's upright position. It can now be lowered until it is flush with the work surface and in it's concealed position. Be sure the power supply cord/cable is free to move up & down with the power center. (Figure 11)



Figure 10

- 10a. To remove the power center raise to the upright position and squeeze the sides of the power center close to the grommet and lift the power center out of the grommet.

7. Wiring Diagram (Model BE00606 & BE01133 only):

- Black ————— Hot
- White ————— Neutral
- Green ————— Ground

Note: Template drawing not to scale

